


# WILLOW

## ecoBACK

|                                                                                                     |                                                                                                                                                     |                                                                                                      |                                                                           |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| CONSTRUCTION<br>STRUCTURE<br>STRUKTUR<br>STRUCTUUR                                                  | Tufted 1/12" Loop<br>Tufté 1/12" Bouclé<br>Getuftet 1/12" Schlinge<br>Getuft 1/12" Luspool                                                          | FIRE RESISTANCE<br>COMPORTEMENT AU FEU<br>BRENNVERHALTEN<br>BRANDGEDRAG                              | EN 13501-1: B <sub>s</sub> -s1                                            |
| PILE MATERIAL<br>COUCHE D'USURE<br>POLMATERIAL<br>POOLMATERIAAL                                     | 100% ECONYL® yarn<br>100% Regenerated Solution Dyed Nylon                                                                                           | FASTNESS TO LIGHT<br>SOLIDITÉ À LA LUMIÈRE<br>LICHTECHTHEIT<br>LICHTECHTHEID                         | ISO 105-B02<br>≥ 7                                                        |
| SECONDARY BACKING<br>DOSSIER<br>RÜCKENAUSSTATTUNG<br>RUG                                            | ecoBack: fully recyclable polyolefin based<br>carpet tile backing with minimum 75%<br>post-industrial recycled content                              | RUBBING FASTNESS<br>SOLIDITÉ AU FROTTEMENT<br>REIBECHTHEIT<br>WRIJFECHTHEID                          | EN ISO 105-X12<br>≥ 4                                                     |
| TOTAL WEIGHT<br>POIDS TOTAL<br>GESAMTGEWICHT<br>TOTAAL GEWICHT                                      | Ca. 3.900 g/m²                                                                                                                                      | COLOUR FASTNESS TO WATER<br>SOLIDITÉ À L'EAU<br>WASSERECHTHEIT<br>WATERECHTHEID                      | EN ISO 105-E01<br>≥ 4                                                     |
| PILE WEIGHT<br>POIDS DU VELOURS<br>POLEINSATZGEWICHT<br>POOLGEWICHT                                 | Ca. 880 g/m²                                                                                                                                        | THERMAL RESISTANCE<br>RÉSISTANCE THERMIQUE<br>WÄRMEDURCHLABWIDERSTAND<br>WARMTEDOORLAATWEERSTAND     | ISO 8302<br>0,086 m² K/W                                                  |
| PILE ABOVE BACKING<br>POIDS DE VELOURS UTILE<br>POLNUTZSCHICHTGEWICHT<br>NUTTIG POOLGEWICHT         | Ca. 630 g/m²                                                                                                                                        | IMPACT NOISE RATING<br>ISOLATION PHONIQUE<br>TRITTSCHALLVERBESSERUNGMAß<br>GELUIDSISOLATIE           | ISO 10140<br>ΔL <sub>w</sub> : 24 dB                                      |
| TOTAL HEIGHT<br>ÉPAISSEUR TOTALE<br>GESAMTDICKE<br>TOTAAL DIKTE                                     | Ca. 7,5 mm                                                                                                                                          | SOUND ABSORPTION<br>ABSORPTION PHONIQUE<br>SCHALLABSORPTIONSGRAD<br>GELUIDSABSORPTIE                 | ISO 354<br>α <sub>w</sub> : 0,15                                          |
| PILE HEIGHT<br>ÉPAISSEUR DU VELOURS<br>POLDICKE<br>POOLHOOGTE                                       | Ca. 4,3 mm                                                                                                                                          | PERMANENT ANTISTATIC<br>ANTISTATIQUE PERMANENT<br>PERMANENT ANTISTATISCH<br>PERMANENT ANTISTATISCH   | ISO 6356<br>≤ 2 kV                                                        |
| PILE DENSITY<br>DENSITÉ DU VELOURS<br>POLROHDICHTHEIT<br>POOLDICHTHEID                              | Ca. 0,146 g/cm³                                                                                                                                     | TRANSVERSAL RESISTANCE<br>RÉSISTANCE TRANSVERSALE<br>DURCHGANGSWIDERSTAND<br>DOORGANGSWEEERSTAND     | ISO/DIS 10965<br>≤ 10 <sup>9</sup> Ohm                                    |
| TUFT DENSITY<br>NOMBRE DE TOUFFES<br>NOPPENZAHL<br>AANTAL PUNTEN                                    | Ca. 225.000 /m²                                                                                                                                     | SIZE & PACKING<br>DIMENSION & EMBALLAGE<br>ABMESSUNG & VERPACKUNG<br>AFMETINGEN & VERPAKKING         | 50 cm x 50 cm   19.7" x 19.7"<br>box: 5 m²   5.98 yd²<br>pallet: 20 boxes |
| CLASSIFICATION<br>CLASSEMENT<br>KLASSIFIKATION<br>CLASSIFICATIE                                     | EN 1307<br>33 - LC2                                                                                                                                 | NUMBER OF COLOURS<br>NOMBRE DE COLORIS<br>ANZAHL DER FARBEN<br>AANTAL KLEUREN                        | 12                                                                        |
| CASTOR CHAIR SUITABILITY<br>EMPLOI CHAISE À ROULETTES<br>STUHLROLLENEIGNUNG<br>ROLSTOELGESCHIKTHEID | ISO 4918<br>A : continuous use                                                                                                                      | DIMENSIONAL STABILITY<br>STABILITÉ DIMENSIONNELLE<br>DIMENSIONSTABILITÄT<br>DIMENSIONELE STABILITEIT | EN 986<br>max. 0,2%                                                       |
| CCRADLE TO CRADLE<br>CERTIFIED®                                                                     | Gold level according to version 4.0<br>848, 908, 968<br><br>Silver level according to version 4.0<br>280, 346, 517, 577, 592, 626, 957, 989,<br>991 | GUT-NR                                                                                               | D60740DB                                                                  |
|                                                                                                     |                                                                                                                                                     | LEED®                                                                                                | Product contributes toward satisfying<br>Credits under LEED®.*            |
|                                                                                                     |                                                                                                                                                     | DGNB                                                                                                 | modulyss is member of DGNB, the<br>German Sustainable Building Council    |

\* For more information, see the modulyss sustainable datasheets. - Remark: Products are not reviewed under LEED®, LEED® credit requirements cover the performance of materials in aggregate, not the performance of individual products or brands. The LEED® green building certification program is the nationally accepted benchmark for the design, construction, and operation of green buildings. For more information on LEED®, visit [www.usgbc.org/contact](http://www.usgbc.org/contact).

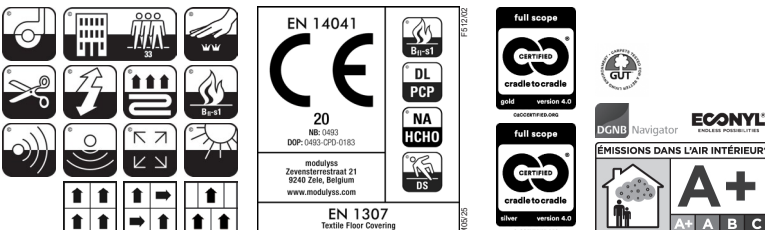

We reserve all rights for technical improvements | Technische wijzigingen, ter verbetering van het product, worden voorbehouden | Sous réserve de toute modification technique visant à l'amélioration constante de nos produits | Durch technische Weiterentwicklung sind bedingte Änderungen vorbehalten

# modulyss®