


modulyss®

PRODUCT
CATALOGUE

SIZES


STANDARD SIZE



50 x 50 cm

Our carpet tiles come in the standard size of 50 x 50 cm.

OPTIONAL SIZES



100 x 100 cm



50 x 100 cm



25 x 100 cm

Three optional sizes are available on request, as from 100 m².



ARTUS

PRICE RANGE ■ ■ □

PART OF THE PLUS DESIGN CONCEPT



LRV 13 L 43 280



LRV 5 L 28 346



LRV 16 L 47 517



LRV 9 L 37 577



LRV 4 L 23 592




LRV 6 L 29 626



LRV 18 L 50 848



LRV 25 L 57 908



LRV 15 L 46 957



LRV 28 L 60 968



LRV 9 L 36 989





LRV 5 L 26 991

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B ₁ -s1 (tackified)
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% EgoCycle PA6 Solution Dyed Nylon 95% recycled content	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS: designed for easy disassembly, with 85% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.100 g/m ² Ca. 91.4 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 630 g/m ² Ca. 18.6 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,070 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 410 g/m ² Ca. 12.1 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 22 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.1 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.0 mm Ca. 0.12"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.136 g/cm ³ Ca. 3.669 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 235.000 /m ² Ca. 196,491/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 6 m ² 7.18 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 848, 908, 968	GUT-NR	4B3BBFAB
	Silver level according to version 4.0 280, 346, 517, 577, 592, 626, 957, 989, 991	BUILDING CERTIFICATION SCHEMES DGNB	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.



CAMBRIDGE&

PRICE RANGE ■■■

PART OF THE & DESIGN CONCEPT



LRV 19 L 51 181



LRV 22 L 54 213



LRV 17 L 49 224



LRV 15 L 46 303



LRV 8 L 33 307



LRV 7 L 33 314



LRV 5 L 27 316



LRV 15 L 45 322



LRV 3 L 20 346



LRV 22 L 54 386




LRV 7 L 31 463



LRV 8 L 33 482



LRV 6 L 29 504



LRV 11 L 39 506



LRV 8 L 33 511



LRV 3 L 20 553



LRV 10 L 38 569



LRV 9 L 36 579



LRV 3 L 18 592



LRV 7 L 31 595



LRV 14 L 44 601



LRV 8 L 34 613




LRV 4 L 24 616



LRV 17 L 48 662



LRV 7 L 32 684



LRV 20 L 51 817



LRV 6 L 29 822



LRV 11 L 40 823



LRV 9 L 36 827



LRV 7 L 32 830



LRV 5 L 25 907



LRV 12 L 41 915



LRV 5 L 26 963



LRV 3 L 21 965



LRV 2 L 14 991




LRV 10 L 38 994

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Cutpile Frisé Tufté 1/10" Cutpile Frisé Getuftet 1/10" Cutpile Frisé Getuft 1/10" Cutpile Frisé	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6.6	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.650 g/m ² Ca. 137.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 1.050 g/m ² Ca. 31.0 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,075 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 770 g/m ² Ca. 22.7 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 27 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 8.0 mm Ca. 0.31"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,02 0,02 0,09 0,27 0,38 0,51
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 5.0 mm Ca. 0.2"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,154 g/cm ³ Ca. 4.155 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 197.500 /m ² Ca. 165,136 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC3	NUMBER OF COLOURS NOMBRE DE COULEURS ANZAHL DER FARBEN AANTAL KLEUREN	23 + 13, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	79A87BF4
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

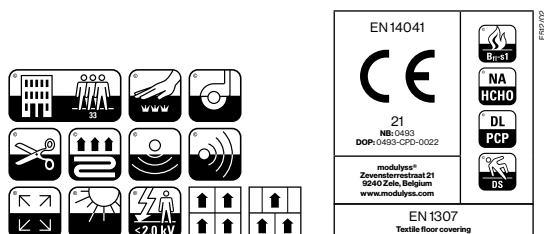

CORE

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626




LRV 7 L 32 659




LRV 15 L 46 672



LRV 9 L 36 853



LRV 10 L 37 901




LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 600 g/m ² Ca. 17.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,086 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 425 g/m ² Ca. 12.5 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 23 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.7 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.2 mm Ca. 0.13"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,133 g/cm ³ Ca. 3.588 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	7FBEEFEE9 Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

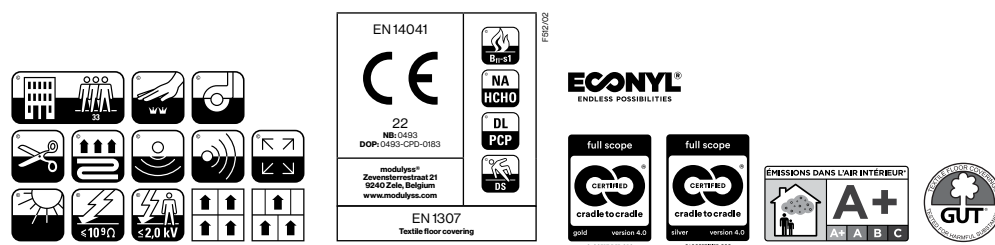

DSGN

ABSOLUTE

PRICE RANGE ■ ■ □


PART OF THE DSGN DESIGN CONCEPT



LRV 22 L 54 039




LRV 29 L 61 061



LRV 12 L 42 141



LRV 33 L 64 204



LRV 11 L 39 313



LRV 5 L 26 340



LRV 6 L 30 569



LRV 7 L 32 695



LRV 7 L 33 822



LRV 5 L 26 826



LRV 26 L 58 912




LRV 26 L 58 914



LRV 15 L 46 932



LRV 7 L 32 965



LRV 16 L 46 990




LRV 3 L 20 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m ² Ca. 132.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 730 g/m ² Ca. 21.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,093 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 29 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20 Hz 125 250 500 1000 2000 4000 α _s 0,01 0,04 0,09 0,22 0,34 0,42
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,0 mm Ca. 0.16"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,113 g/cm ³ Ca. 3.049 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 186.000 /m ² Ca. 155,520 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	633BC12B
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulyss sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

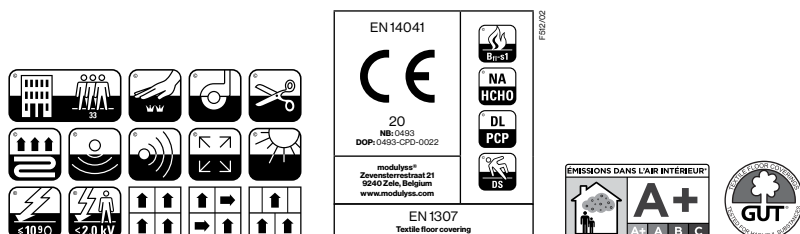

DSGN CLOUD

PRICE RANGE ■■■

PART OF THE DSGN DESIGN CONCEPT



LRV 23 L 55 039



LRV 29 L 61 061



LRV 12 L 42 141



LRV 34 L 65 204



LRV 11 L 39 313



LRV 4 L 24 340



LRV 5 L 28 569



LRV 7 L 33 695



LRV 7 L 33 822



LRV 5 L 26 826



LRV 25 L 57 912



LRV 26 L 58 914



LRV 16 L 47 932



LRV 7 L 31 965



LRV 14 L 44 990





LRV 3 L 20 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1 ASTM E-648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.600 g/m ² Ca. 135.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 680 g/m ² Ca. 20.1 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,070 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 420 g/m ² Ca. 12.4 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.7 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,03 0,06 0,18 0,31 0,39
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,3 mm Ca. 0.13"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,127 g/cm ³ Ca. 3.426 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 193.000 /m ² Ca. 161,373/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRS SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	CC1A5FAA
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.



DSGN FORCE

PRICE RANGE ■■■

PART OF THE DSGN DESIGN CONCEPT



LRV 13 L 43 042



LRV 15 L 45 093



LRV 9 L 36 095



LRV 3 L 21 096



LRV 10 L 37 142



LRV 8 L 34 282



LRV 6 L 29 306



LRV 3 L 19 512



LRV 6 L 30 602




LRV 6 L 30 797

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Cutpile Frisé Tufté 1/10" Cutpile Frisé Getuftet 1/10" Cutpile Frisé Getuft 1/10" Cutpile Frisé	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.800 g/m ² Ca. 141.6 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 1.270 g/m ² Ca. 37.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,103 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 1.061 g/m ² Ca. 31.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 28 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 9,3 mm Ca. 0.37"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20 Hz 125 250 500 1000 2000 4000 α _s 0,01 0,02 0,08 0,21 0,32 0,40
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 6,3 mm Ca. 0.25"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,168 g/cm ³ Ca. 4.532 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ¹¹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 182.000 /m ² Ca. 152,176/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 4 m ² 4.78 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC5	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	10
CASTOR CHAIRS SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	483C9A6F
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

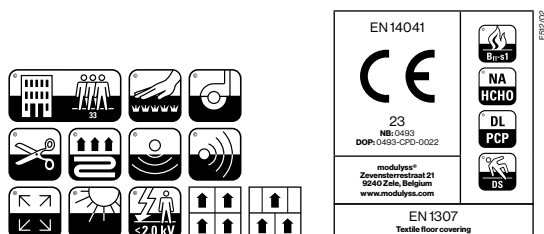

DSGN TWEED

PRICE RANGE ■■■


PART OF THE DSGN DESIGN CONCEPT



LRV 23 L 55 039



LRV 29 L 61 061



LRV 13 L 42 141



LRV 33 L 64 204



LRV 10 L 39 313



LRV 4 L 25 340



LRV 6 L 29 569



LRV 8 L 35 695




LRV 7 L 32 822




LRV 5 L 27 826



LRV 25 L 57 912




LRV 24 L 56 914



LRV 15 L 46 932



LRV 6 L 28 965



LRV 11 L 39 990




LRV 3 L 19 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.600 g/m ² Ca. 135.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 680 g/m ² Ca. 20.1 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,070 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 420 g/m ² Ca. 12.4 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.7 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,05 0,06 0,17 0,29 0,37
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,3 mm Ca. 0.13"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,127 g/cm ³ Ca. 3.426 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 221.000 /m ² Ca. 184,785/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	CD42F042
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulyss sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

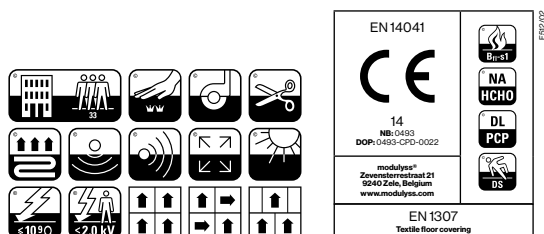

DUNE

PRICE RANGE ■■■


PART OF THE HERITAGE DESIGN CONCEPT

			
LRV 26 L 58102	LRV 20 L 52216	LRV 21 L 53224	LRV 5 L 27395
			
LRV 10 L 38517	LRV 6 L 28579	LRV 10 L 37683	LRV 12 L 42831
			
LRV 6 L 30832	LRV 25 L 57901	LRV 12 L 41908	LRV 3 L 21965

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.600 g/m ² Ca. 106.2 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHEITHEIT WATERECHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 640 g/m ² Ca. 18.9 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,078 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 490 g/m ² Ca. 14.5 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.8 mm Ca. 0.27"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.8 mm Ca. 0.15"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 216,200 /m ² Ca. 180,771/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPAKKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 102, 832, 901, 908 Silver level according to version 4.0 216, 224, 395, 517, 579, 683, 831, 965	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	48A07435 Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

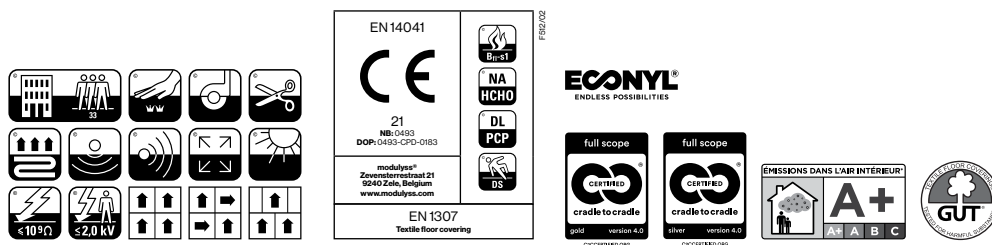

ETCH

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626




LRV 7 L 32 659




LRV 15 L 46 672



LRV 9 L 36 853



LRV 10 L 37 901




LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m ² Ca. 19.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	ACBF3E3E Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

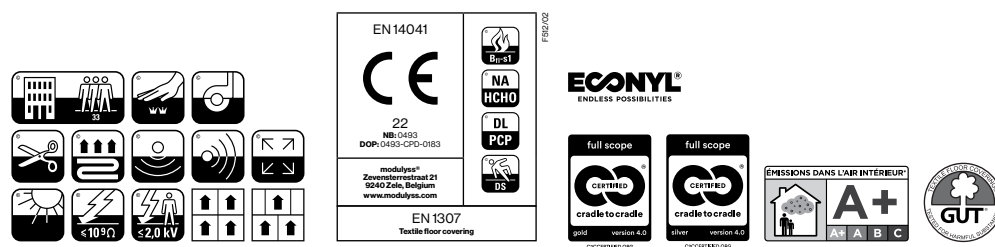

ETCH GRADIENT

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626



LRV 7 L 32 659



LRV 15 L 46 672



LRV 9 L 36 853



LRV 10 L 37 901



LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m ² Ca. 19.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	ACBF3E3E Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

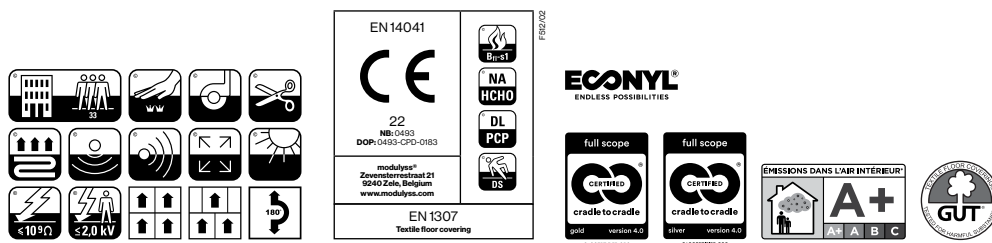

FADE

PRICE RANGE ■■■

PART OF THE MODUS DESIGN CONCEPT



LRV 20 L 52 106



LRV 20 L 56 238



LRV 20 L 52 263



LRV 17 L 48 344




LRV 17 L 48 356



LRV 20 L 52 528



LRV 16 L 47 584




LRV 17 L 49 697



LRV 13 L 43 908



LRV 27 L 59 932



LRV 10 L 37 965




LRV 19 L 51 967

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.600 g/m ² Ca. 106.2 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 550 g/m ² Ca. 16.2 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,067 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 415 g/m ² Ca. 12.2 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 22 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.0 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2.8 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,148 g/cm ³ Ca. 3.993 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 222.000 /m ² Ca. 185,621/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPAKKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 106,356,908,932,967	GUT-NR	9FCCA475
	Silver level according to version 4.0 238,263,344,528,584,697,965	BUILDING CERTIFICATION SCHEMES DGNB	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

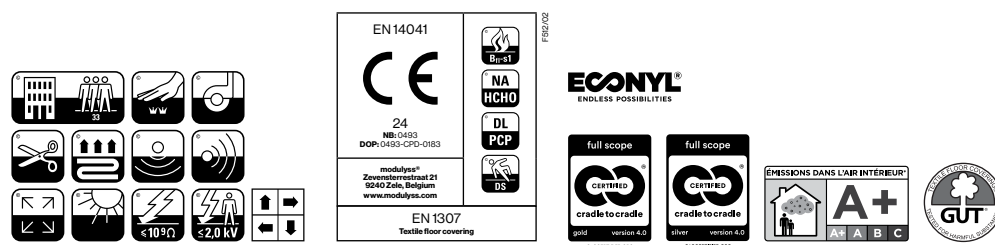

FASHION&

PRICE RANGE ■■■

PART OF THE & DESIGN CONCEPT



LRV 33 L 64 105



LRV 15 L 46 136



LRV 16 L 48 181



LRV 16 L 47 206



LRV 44 L 73 240



LRV 22 L 55 241



LRV 8 L 34 317



LRV 10 L 37 332



LRV 17 L 48 375



LRV 8 L 33 381



LRV 4 L 22 395



LRV 14 L 44 398



LRV 6 L 28 431



LRV 5 L 25 482



LRV 3 L 16 512



LRV 5 L 26 580



LRV 6 L 27 585



LRV 14 L 44 595



LRV 12 L 42 649



LRV 13 L 43 669



LRV 4 L 23 671



LRV 22 L 55 673



LRV 5 L 27 678



LRV 9 L 36 699



LRV 6 L 33 817



LRV 8 L 34 819



LRV 4 L 23 830



LRV 3 L 18 832



LRV 20 L 52 915



LRV 11 L 39 936



LRV 11 L 39 942



LRV 20 L 52 950



LRV 7 L 30 961



LRV 4 L 23 966



LRV 27 L 59 979



LRV 3 L 17 990

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1 ASTME -648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.800 g/m ² Ca. 141.6 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 870 g/m ² Ca. 25.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,070 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 595 g/m ² Ca. 17.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,7 mm Ca. 0.3"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,01 0,05 0,06 0,17 0,32 0,44
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,1 mm Ca. 0.16"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,145 g/cm ³ Ca. 3.912 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 240.000 /m ² Ca. 200,671/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	15 + 21, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%

GUT-NR

1814EC70

BUILDING CERTIFICATION SCHEMES


Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**

DGNB

modulyss is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulyss sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

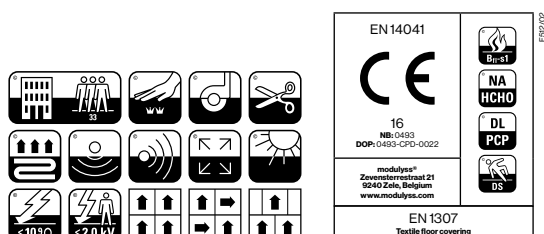

FIRST DECODE

PRICE RANGE ■■■

PART OF THE FIRST DESIGN CONCEPT



LRV 26 L 58 061




LRV 22 L 54 102



LRV 11 L 39 140



LRV 21 L 53 175




LRV 20 L 52 215



LRV 9 L 36 345



LRV 6 L 28 388




LRV 4 L 22 512



LRV 8 L 34 596



LRV 15 L 45 626



LRV 7 L 32 658



LRV 15 L 45 815



LRV 9 L 37 842



LRV 6 L 30 847




LRV 23 L 55 914



LRV 13 L 43 957



LRV 5 L 26 965




LRV 3 L 19 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{s1} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m ² Ca. 132.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 590 g/m ² Ca. 17.4 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,066 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 360 g/m ² Ca. 10.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 25 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.5 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,02 0,02 0,06 0,15 0,27 0,34
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,9 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,124 g/cm ³ Ca. 3.345 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 202.000 /m ² Ca. 168,898/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	18
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	D8715FC9
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

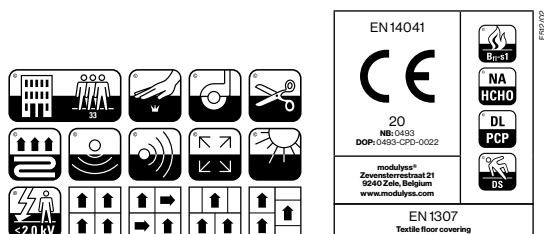

FIRST DEFINE

PRICE RANGE ■■■

PART OF THE FIRST DESIGN CONCEPT



LRV 27 L 59 061



LRV 25 L 57 102



LRV 12 L 41 140



LRV 23 L 55 175



LRV 22 L 54 215



LRV 9 L 37 345



LRV 6 L 29 388



LRV 4 L 24 512




LRV 9 L 35 596



LRV 16 L 47 626



LRV 7 L 32 658



LRV 16 L 47 815



LRV 10 L 38 842



LRV 7 L 31 847



LRV 25 L 57 914



LRV 19 L 46 957



LRV 6 L 29 965





LRV 3 L 20 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m ² Ca. 132.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 590 g/m ² Ca. 17.4 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,066 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 360 g/m ² Ca. 10.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 25 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.5 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,02 0,02 0,06 0,15 0,27 0,34
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,7 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,124 g/cm ³ Ca. 3.345 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 202.000 /m ² Ca. 168,898/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	18
CASTOR CHAIRS SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,20%
CERTIFICATION QB-UPEC NR. DU CERTIFICATION	U ₃ P ₃ E ₃ C ₀ 329T-012.1	GUT-NR	68E92E25
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.



FIRST FORWARD

PRICE RANGE ■ □ □

PART OF THE FIRST DESIGN CONCEPT




LRV 19 L 51 061



LRV 18 L 49 140




LRV 28 L 60 172



LRV 25 L 57 180



LRV 26 L 58 202



LRV 16 L 47 233



LRV 12 L 41 345



LRV 4 L 24 355



LRV 11 L 39 356



LRV 6 L 29 377



LRV 4 L 24 512



LRV 6 L 29 573



LRV 12 L 41 596



LRV 17 L 48 626



LRV 3 L 21 641



LRV 9 L 35 658



LRV 9 L 36 810



LRV 10 L 38 817



LRV 18 L 49 818



LRV 9 L 37 829



LRV 13 L 43 907



LRV 25 L 57 909



LRV 8 L 34 961



LRV 16 L 47 983



LRV 5 L 26 989



LRV 3 L 20 990



LRV 4 L 23 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B ₁ -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.300 g/m ² Ca. 126.8 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 540 g/m ² Ca. 15.9 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,062 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 340 g/m ² Ca. 10.0 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.2 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,03 0,05 0,16 0,33 0,41
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,9 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTHEIT POOLDICHTHEID	Ca. 0,117 g/cm ³ Ca. 3.157 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 180.000 /m ² Ca. 150,503/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	27
CASTOR CHAIRS SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,20%
CERTIFICATION QB-UPEC NR. DU CERTIFICATION	U ₃ P ₃ E ₃ C ₀ 329T-011.1	GUT-NR	386B09A7

BUILDING CERTIFICATION SCHEMES



Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**

DGNB

modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.



FIRST SWAY

PRICE RANGE ■■■

PART OF THE FIRST DESIGN CONCEPT



LRV 27 L 59 061



LRV 23 L 55 102



LRV 12 L 41 140



LRV 23 L 55 175



LRV 21 L 53 215



LRV 9 L 35 345



LRV 5 L 28 388



LRV 4 L 23 512



LRV 8 L 34 596




LRV 15 L 45 626



LRV 7 L 32 658



LRV 15 L 46 815



LRV 10 L 38 842



LRV 7 L 32 847




LRV 25 L 57 914



LRV 19 L 46 957



LRV 6 L 29 965




LRV 3 L 20 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m ² Ca. 132.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 590 g/m ² Ca. 17.4 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,067 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 360 g/m ² Ca. 10.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 22 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.5 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,7 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,124 g/cm ³ Ca. 3.345 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 202.000 /m ² Ca. 168,898/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	18
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	0D39C087
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

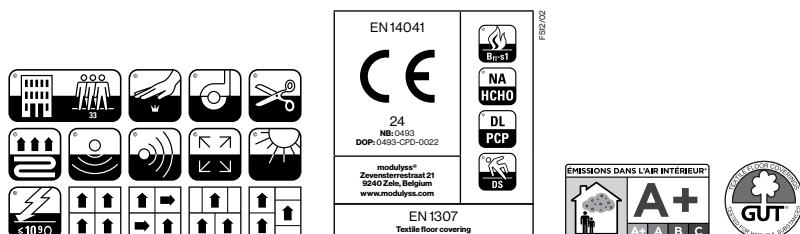

FLUID&

PRICE RANGE ■■■

PART OF THE & DESIGN CONCEPT



LRV 23 L 56 224



LRV 21 L 53 306



LRV 16 L 47 569



LRV 18 L 49 604



LRV 26 L 58 850



LRV 17 L 49 961




LRV 17 L 48 990

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tip sheared printed Tufté 1/12" Bouclé Tip sheared imprimé Getuftet 1/12" Schlinge Tip sheared gedruckt Getuft 1/12" Luspool Tip sheared bedrukt	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.750 g/m ² Ca. 140.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 900 g/m ² Ca. 26.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,094 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 570 g/m ² Ca. 16.8 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 25 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,5 mm - 8,8 mm Ca. 0.3" - 0.35"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,01 0,07 0,20 0,35 0,46
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,8 mm - 5 mm Ca. 0.15" - 0.2"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,114 - 0,150 g/cm ³ Ca. 3.076 - 4.047 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 240.000 /m ² Ca. 200,671/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	7
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%

GUT-NR	4B4D07E1
BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

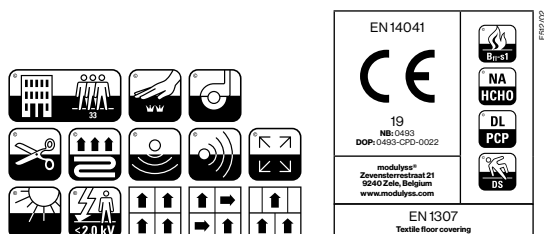

ECONYL®
ENDLESS POSSIBILITIES



FORMA

PRICE RANGE ■■■

PART OF THE PLUS DESIGN CONCEPT



LRV 14 L 45 280



LRV 6 L 29 346



LRV 17 L 48 517



LRV 8 L 33 577



LRV 4 L 24 592



LRV 6 L 29 626



LRV 17 L 48 846



LRV 24 L 56 908



LRV 16 L 47 957



LRV 26 L 58 968



LRV 10 L 37 989





LRV 5 L 26 991

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{s1} -s1 (tackified)
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS: designed for easy disassembly, with 85% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.100 g/m ² Ca. 91.4 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 630 g/m ² Ca. 18.6 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,070 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 410 g/m ² Ca. 12.1 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.1 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.0 mm Ca. 0.12"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.136 g/cm ³ Ca. 3.669 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 245.000 /m ² Ca. 204,852 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 6 m ² 7.18 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 848, 908, 968	GUT-NR	4B3BBFAB
	Silver level according to version 4.0 280, 346, 517, 577, 592, 626, 957, 989, 991	BUILDING CERTIFICATION SCHEMES DGNB	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.



GLEAM

PRICE RANGE ■■■

PART OF THE DELIGHT DESIGN CONCEPT



LRV 22 L 54 020



LRV 21 L 53 033



LRV 13 L 43 212



LRV 7 L 32 306



LRV 11 L 40 314



LRV 4 L 23 346



LRV 12 L 41 398



LRV 10 L 37 462



LRV 5 L 24 482



LRV 9 L 36 511



LRV 8 L 33 530



LRV 17 L 48 535



LRV 8 L 32 569




LRV 13 L 42 579



LRV 3 L 17 581



LRV 11 L 39 606



LRV 10 L 37 609



LRV 9 L 35 615



LRV 8 L 34 826



LRV 15 L 45 847




LRV 6 L 29 866



LRV 13 L 43 894




LRV 15 L 46 907



LRV 5 L 25 966



LRV 8 L 33 989



LRV 2 L 13 990



LRV 10 L 37 994

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Cutpile Frisé Tufté 1/10" Cutpile Frisé Getuftet 1/10" Cutpile Frisé Getuft 1/10" Cutpile Frisé	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B ₁ -s1 ASTME -648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	25% Econyl PA6 Solution Dyed Nylon + 75% PA6 25% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 5.150 g/m ² Ca. 151.9 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 1.300 g/m ² Ca. 38.3 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,070 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 1.045 g/m ² Ca. 30.8 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 31 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 9,5 mm Ca. 0.37"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,03 0,12 0,23 0,44 0,57
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 6,2 mm Ca. 0.24"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,169 g/cm ³ Ca. 4.559 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 164.000 /m ² Ca. 137,125/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 4 m ² 4.78 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC5	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	27, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%

GUT-NR

14ABF3F3

BUILDING CERTIFICATION SCHEMES


Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**

DGNB

modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

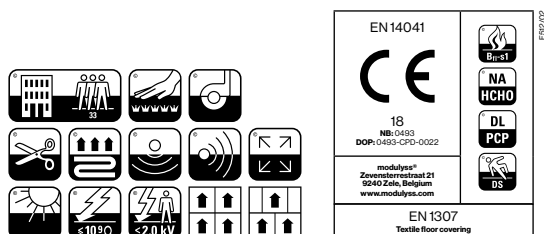

ECONYL®
ENDLESS POSSIBILITIES



GRIND

PRICE RANGE ■■■

PART OF THE HANDCRAFT DESIGN CONCEPT



LRV 31 L 63 130



LRV 24 L 56 230



LRV 14 L 44 557



LRV 13 L 43 639



LRV 12 L 42 850



LRV 10 L 38 910



LRV 15 L 46 936




LRV 5 L 24 966

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Minituft 5/64" Loop Minituft 5/64" Bouclé Minituft 5/64" Schlinge Minituft 5/64" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 C _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.100 g/m ² Ca. 120.9 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 600 g/m ² Ca. 17.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,042 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 197 g/m ² Ca. 5.8 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 15 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 5.5 mm Ca. 0.22"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 1,0 mm Ca. 0.04"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,197 g/cm ³ Ca. 5.315 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 200.000 /m ² Ca. 167,226/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPAKKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	8
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Silver level according to version 4.0 130, 230, 557, 639, 850, 910, 936, 966	GUT-NR	3CB06F32
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

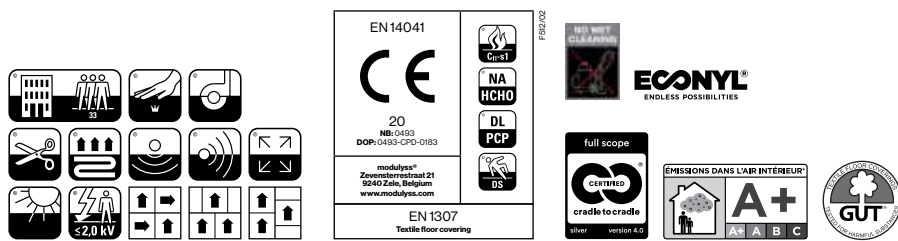



PRICE RANGE ■■■

PART OF THE MODUS DESIGN CONCEPT



LRV 20 L 52 106



LRV 20 L 56 238



LRV 20 L 52 263



LRV 17 L 48 344



LRV 17 L 48 356



LRV 29 L 52 528



LRV 16 L 47 584



LRV 17 L 49 697



LRV 13 L 43 908



LRV 27 L 59 932



LRV 10 L 37 965




LRV 19 L 51 967

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.650 g/m ² Ca. 107.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 600 g/m ² Ca. 17.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,072 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 440 g/m ² Ca. 13.0 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 21 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.2 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2.9 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.152 g/cm ³ Ca. 4.101 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 183.000 /m ² Ca. 153,012 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 106,344,356,908,932,967	GUT-NR	9882BBC3
	Silver level according to version 4.0 238,263,528,584,697,965	BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

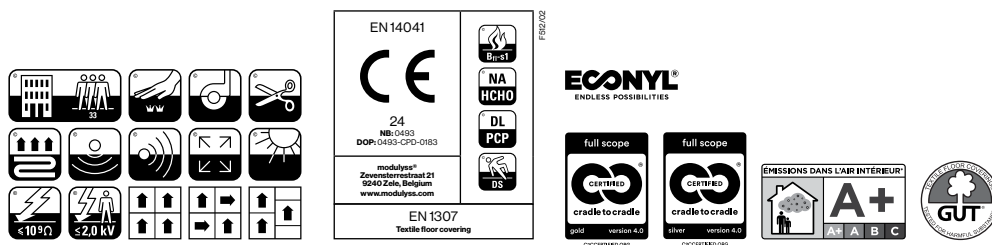

LEAF

PRICE RANGE ■■■

PART OF THE HANDCRAFT DESIGN CONCEPT



LRV 37 L 67 130



LRV 22 L 54 180



LRV 25 L 57 230



LRV 9 L 36 306



LRV 11 L 40 557



LRV 3 L 20 578



LRV 13 L 42 639



LRV 11 L 40 850



LRV 9 L 35 910



LRV 13 L 43 936



LRV 22 L 54 957




LRV 3 L 18 966

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.900 g/m ² Ca. 115.0 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 880 g/m ² Ca. 26.0 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,086 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 610 g/m ² Ca. 18.0 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,5 mm Ca. 0.3"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,3 mm Ca. 0.17"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,142 g/cm ³ Ca. 3.831 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 225.000 /m ² Ca. 188,129/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPAKKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 130, 306, 557, 910, 957	GUT-NR	8390EFDE
	Silver level according to version 4.0 180, 230, 578, 639, 850, 936, 966	BUILDING CERTIFICATION SCHEMES DGNB	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

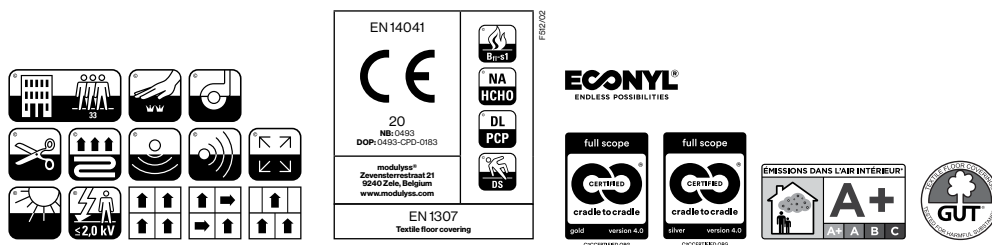

LITHO

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626




LRV 7 L 32 659



LRV 15 L 46 672




LRV 9 L 36 853



LRV 10 L 37 901




LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m ² Ca. 19.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	ACBF3E3E Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

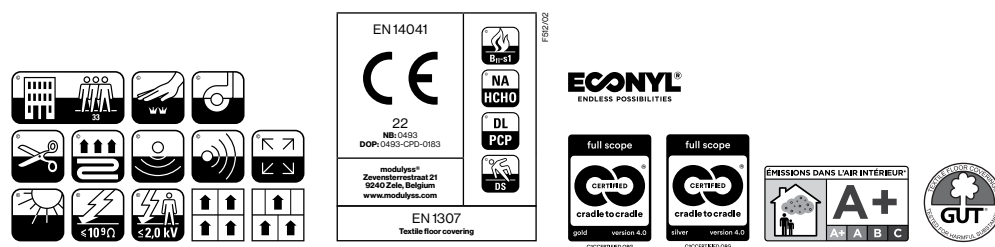

LITHO GRADIENT

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626



LRV 7 L 32 659




LRV 15 L 46 672



LRV 9 L 36 853



LRV 10 L 37 901




LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m ² Ca. 19.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 4 m ² 4.78 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	ACBF3E3E Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

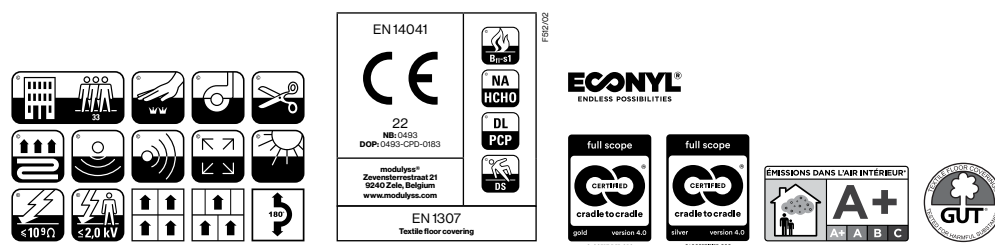

LUME

PRICE RANGE ■■■

PART OF THE HAELO DESIGN CONCEPT



LRV 21 L 53 140



LRV 21 L 53 398




LRV 10 L 39 447



LRV 23 L 55 514



LRV 22 L 54 528



LRV 6 L 30 542



LRV 9 L 36 605



LRV 25 L 57 651



LRV 21 L 53 766



LRV 39 L 68 912



LRV 22 L 54 945



LRV 15 L 46 950



LRV 36 L 66 957



LRV 28 L 60 967



LRV 10 L 37 982





LRV 9 L 36 986

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{s1} -s1 (tackified)
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Thrive matter PA6 Solution Dyed Nylon 90% recycled content	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS: designed for easy disassembly, with 85% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.100 g/m ² Ca. 91.4 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 715 g/m ² Ca. 21.1 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,080 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 460 g/m ² Ca. 13.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 25 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.5 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTHEIT POOLDICHTHEID	Ca. 0.131 g/cm ³ Ca. 3.534 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 176.000 /m ² Ca. 147,159/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 6 m ² 7.18 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Silver level according to version 4.0 140, 398, 447, 514, 528, 542, 605, 651, 766, 912, 945, 950, 957, 967, 982, 986	GUT-NR	D7BDBC2E
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.



Thrive[®] matter



MEADOW

PRICE RANGE ■■■

PART OF THE HERITAGE DESIGN CONCEPT



LRV 26 L 58 102



LRV 20 L 52 216



LRV 21 L 53 224



LRV 5 L 27 395



LRV 10 L 38 517



LRV 6 L 28 579



LRV 10 L 37 683



LRV 12 L 42 831



LRV 6 L 30 832



LRV 25 L 57 901



LRV 12 L 41 908




LRV 3 L 21 965

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.600 g/m ² Ca. 106.2 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 640 g/m ² Ca. 18.9 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,078 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 490 g/m ² Ca. 14.5 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.8 mm Ca. 0.27"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.8 mm Ca. 0.15"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 216,200 /m ² Ca. 180,771/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPAKKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 102, 832, 901, 908 Silver level according to version 4.0 216, 224, 395, 517, 579, 683, 831, 965	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	48A07435 Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

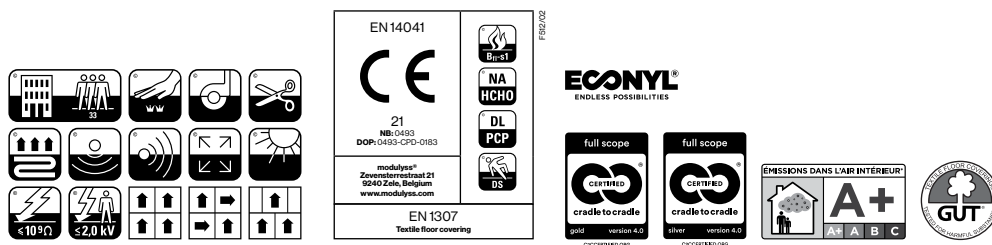

MEZZO

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626




LRV 7 L 32 659




LRV 15 L 46 672



LRV 9 L 36 853




LRV 10 L 37 901




LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m ² Ca. 19.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	ACBF3E3E Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

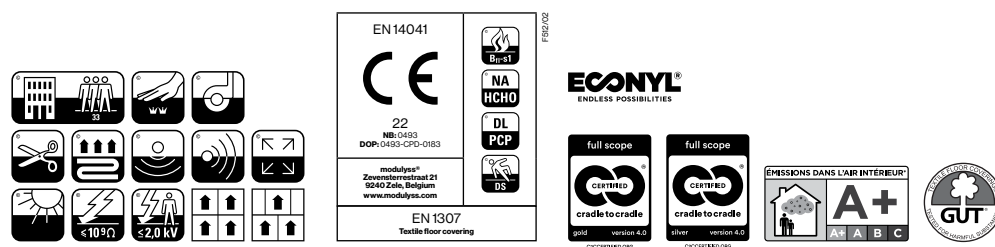

MEZZO GRADIENT

PRICE RANGE ■■■

PART OF THE ARTCORE DESIGN CONCEPT



LRV 28 L 60 010



LRV 19 L 50 012



LRV 29 L 61 208



LRV 5 L 27 389



LRV 13 L 42 398



LRV 8 L 33 501



LRV 7 L 32 518



LRV 26 L 58 626




LRV 7 L 32 659




LRV 15 L 46 672



LRV 9 L 36 853



LRV 10 L 37 901




LRV 12 L 41 904



LRV 7 L 31 911



LRV 30 L 62 932




LRV 20 L 52 983

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m ² Ca. 112.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m ² Ca. 19.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m ² Ca. 13.3 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,2 mm Ca. 0.28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,129 g/cm ³ Ca. 3.480 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m ² Ca. 183,949/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	ACBF3E3E Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

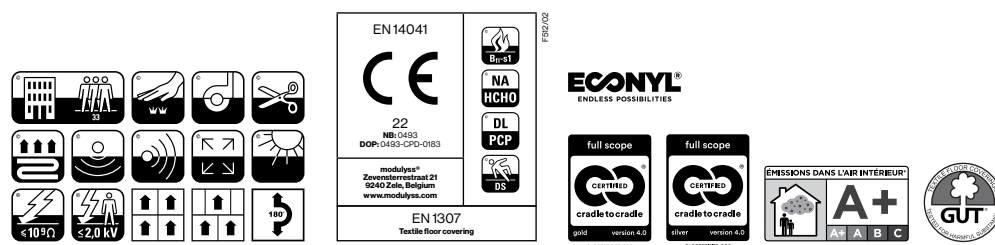

MONOS

PRICE RANGE ■ □ □

PART OF THE PLUS DESIGN CONCEPT



LRV 22 L 54 106



LRV 17 L 49 152



LRV 32 L 63 204



LRV 18 L 50 280



LRV 9 L 35 283



LRV 7 L 32 319



LRV 14 L 44 326



LRV 4 L 24 346



LRV 7 L 32 406



LRV 7 L 31 419



LRV 7 L 33 452



LRV 20 L 52 517



LRV 8 L 34 530



LRV 3 L 19 553



LRV 8 L 33 567



LRV 12 L 41 577



LRV 11 L 40 582



LRV 4 L 25 592



LRV 3 L 22 603



LRV 12 L 42 606



LRV 9 L 36 626




LRV 20 L 52 642



LRV 14 L 45 823



LRV 10 L 37 827



LRV 3 L 18 844



LRV 14 L 44 847



LRV 5 L 26 883



LRV 18 L 50 908



LRV 24 L 56 911



LRV 10 L 38 957



LRV 23 L 55 968



LRV 29 L 61 979



LRV 13 L 42 983



LRV 6 L 29 989



LRV 2 L 17 990




LRV 4 L 23 991

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{s1} -s1 (tackified)
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS: designed for easy disassembly, with 85% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 2.800 g/m ² Ca. 82.6 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 500 g/m ² Ca. 14.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,068 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 330 g/m ² Ca. 9.7 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 5.4 mm Ca. 0.21"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2.8 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,118 g/cm ³ Ca. 3.183 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 171.600 /m ² Ca. 143.480/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 6 m ² 7.18 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	36
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 106, 319, 326, 419, 642, 827, 844, 847, 883, 908, 911, 968, 979, 989, 990 Silver level according to version 4.0 152, 204, 280, 283, 346, 406, 452, 517, 530, 553, 567, 577, 582, 592, 603, 606, 626, 823, 957, 983, 991	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	40CA866B Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

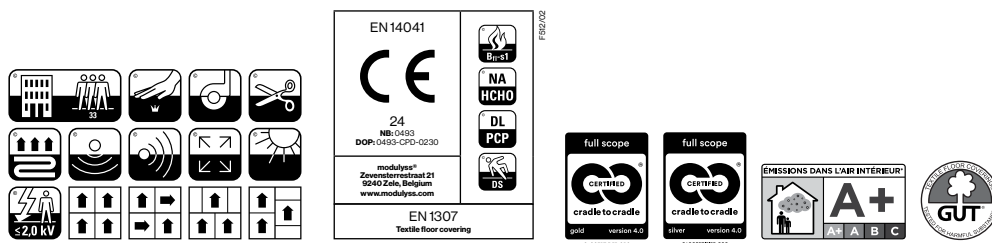

MOSS

PRICE RANGE ■■■

PART OF THE HANDCRAFT DESIGN CONCEPT



LRV 38 L 68 130



LRV 21 L 53 180



LRV 23 L 55 230



LRV 8 L 33 306



LRV 12 L 41 557



LRV 2 L 18 578



LRV 11 L 40 639



LRV 11 L 39 850



LRV 8 L 34 910



LRV 14 L 44 936



LRV 21 L 53 957




LRV 3 L 17 966

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.900 g/m ² Ca. 115.0 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 880 g/m ² Ca. 26.0 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,086 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 590 g/m ² Ca. 17.4 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,5 mm Ca. 0.3"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,3 mm Ca. 0.17"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,137 g/cm ³ Ca. 3.696 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 225.000 /m ² Ca. 188,129/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 130, 306, 557, 910, 957	GUT-NR	BE1E1ACC
	Silver level according to version 4.0 180, 230, 578, 639, 850, 936, 966	BUILDING CERTIFICATION SCHEMES DGNB	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

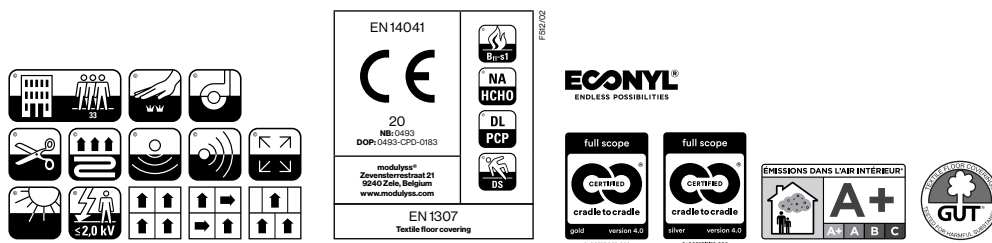

PATCHWORK

PRICE RANGE ■■■

PART OF THE VINTAGE DESIGN CONCEPT



LRV 7 L 32 351



LRV 6 L 29 592



LRV 19 L 50 610



LRV 8 L 34 668



LRV 8 L 34 830



LRV 26 L 58 907



LRV 18 L 50 957



LRV 8 L 33 965




LRV 10 L 38 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop printed Tufté 1/10" Bouclé imprimé Getuftet 1/10" Schlinge gedruckt Getuft 1/10" Luspool bedrukt	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B ₁ -s1 ASTM E-648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.400 g/m ² Ca. 129.8 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 605 g/m ² Ca. 17.8 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,063 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 372 g/m ² Ca. 11.0 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 23 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.6 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,00 0,06 0,15 0,28 0,31
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,1 mm Ca. 0.12"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,120 g/cm ³ Ca. 3.237 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 218.000 /m ² Ca. 182,276 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLOIS ANZAHL DER FARBEN AANTAL KLEUREN	9, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	3CBEDAF8
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

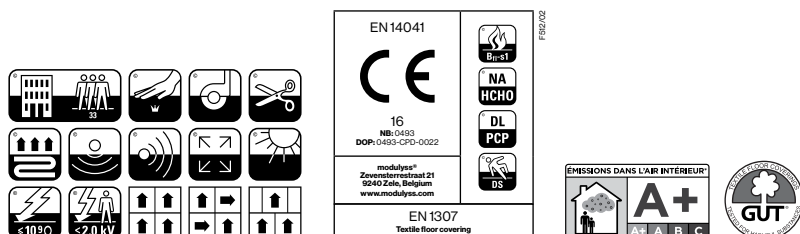


PATTERN

PRICE RANGE ■■■

PART OF THE VINTAGE DESIGN CONCEPT



LRV 5 L 25 351



LRV 4 L 23 592



LRV 7 L 31 610



LRV 6 L 30 668




LRV 4 L 22 830



LRV 22 L 54 909



LRV 11 L 40 957



LRV 3 L 18 965




LRV 9 L 36 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop printed Tufté 1/10" Bouclé imprimé Getuftet 1/10" Schlinge gedruckt Getuft 1/10" Luspool bedrukt	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B ₁ -s1 ASTM E-648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.400 g/m ² Ca. 129.8 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 605 g/m ² Ca. 17.8 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,063 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 372 g/m ² Ca. 11.0 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 23 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.6 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,00 0,06 0,15 0,28 0,31
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,1 mm Ca. 0.12"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,120 g/cm ³ Ca. 3.237 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 218.000 /m ² Ca. 182,276 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	9, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	3CBEDAF8
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

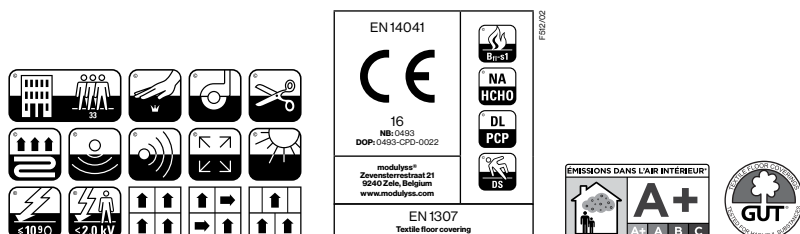

PIXEL

PRICE RANGE ■ ■ □

PART OF THE VINTAGE DESIGN CONCEPT



LRV 8 L 33 351



LRV 7 L 32 592



LRV 17 L 48 610



LRV 10 L 38 668



LRV 6 L 29 830



LRV 23 L 55 907



LRV 16 L 47 957



LRV 5 L 27 965




LRV 11 L 39 995

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop printed Tufté 1/10" Bouclé imprimé Getuftet 1/10" Schlinge gedruckt Getuft 1/10" Luspool bedrukt	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B ₁ -s1 ASTM E-648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.400 g/m ² Ca. 129.8 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 605 g/m ² Ca. 17.8 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,063 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 372 g/m ² Ca. 11.0 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 23 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.6 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,00 0,06 0,15 0,28 0,31
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,1 mm Ca. 0.12"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,120 g/cm ³ Ca. 3.237 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 218.000 /m ² Ca. 182,276 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLOURS ANZAHL DER FARBEN AANTAL KLEUREN	9, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	3CBEDAF8
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

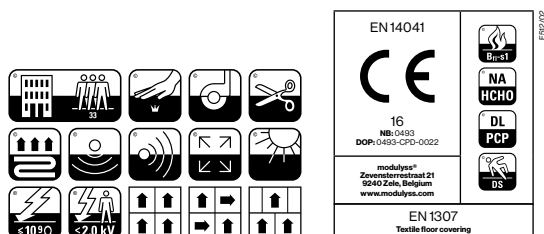

RAY

PRICE RANGE ■■■

PART OF THE HAELO DESIGN CONCEPT



LRV 22 L 54 140



LRV 22 L 54 398




LRV 11 L 39 447



LRV 24 L 56 514



LRV 22 L 54 528



LRV 6 L 29 542



LRV 9 L 37 605



LRV 25 L 58 651



LRV 20 L 52 766



LRV 36 L 67 912



LRV 20 L 52 945



LRV 17 L 48 950



LRV 37 L 67 957



LRV 27 L 59 967



LRV 9 L 37 982




LRV 9 L 37 986

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{s1} -s1 (tackified)
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Thrive matter PA6 Solution Dyed Nylon 90% recycled content	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS: designed for easy disassembly, with 85% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.100 g/m ² Ca. 91.4 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHEIT WATERECHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 715 g/m ² Ca. 21.1 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,080 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 460 g/m ² Ca. 13.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 25 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.5 mm Ca. 0.26"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3.5 mm Ca. 0.14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.131 g/cm ³ Ca. 3.534 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 176.000 /m ² Ca. 147,159/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 6 m ² 7.18 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33-LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Silver level according to version 4.0 140, 398, 447, 514, 528, 542, 605, 651, 766, 912, 945, 950, 957, 967, 982, 986	GUT-NR	D7BDBC2E
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

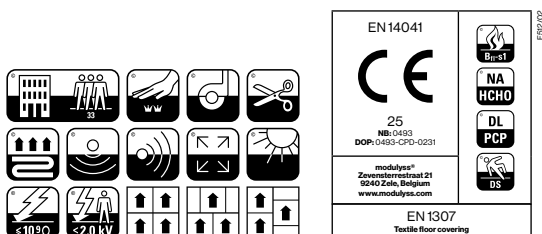

RUST

PRICE RANGE ■■■

PART OF THE MODUS DESIGN CONCEPT



LRV 19 L 51 106



LRV 23 L 55 238



LRV 16 L 47 263



LRV 15 L 46 344



LRV 15 L 46 356



LRV 14 L 45 528



LRV 16 L 47 584



LRV 10 L 38 697



LRV 11 L 40 908



LRV 24 L 56 932



LRV 6 L 30 965




LRV 15 L 45 967

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.600 g/m ² Ca. 106.2 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 550 g/m ² Ca. 16.2 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,067 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 415 g/m ² Ca. 12.2 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 22 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.0 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2.8 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,148 g/cm ³ Ca. 3.993 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 222.000 /m ² Ca. 185,621/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 106,356,908,932,967 Silver level according to version 4.0 238,263,344,528,584,697,965	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	9FCCA475 Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

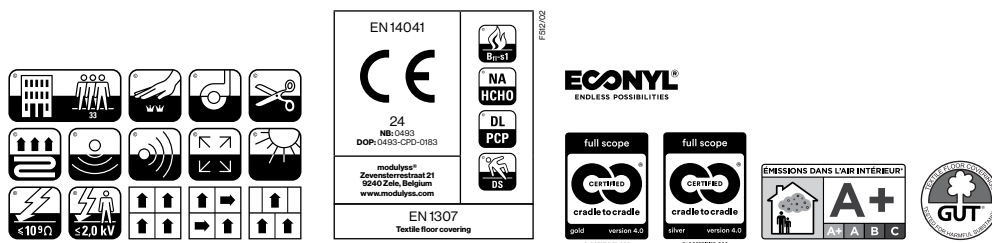

TEXTURA

PART OF THE PLUS DESIGN CONCEPT

PRICE RANGE ■■■



LRV 15 L 45 517



LRV 5 L 26 592



LRV 19 L 51 848



LRV 25 L 57 908



LRV 16 L 47 957



LRV 26 L 58 968



LRV 9 L 36 989



LRV 3 L 22 990




LRV 5 L 28 991

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Minituft 5/64" Loop Minituft 5/64" Bouclé Minituft 5/64" Schlinge Minituft 5/64" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 C _{fl} -s1 (tackified)
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS: designed for easy disassembly, with 85% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.350 g/m ² Ca. 98.8 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 500 g/m ² Ca. 14.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,049 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 205 g/m ² Ca. 6.1 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 15 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 5.2 mm Ca. 0.2"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 1.1 mm Ca. 0.04"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.186 g/cm ³ Ca. 5.018 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 200.000 /m ² Ca. 167,226/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 6 m ² 7.18 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	9
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Silver level according to version 4.0 517, 592, 848, 908, 957, 968, 989, 990, 991	GUT-NR	342888FD
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

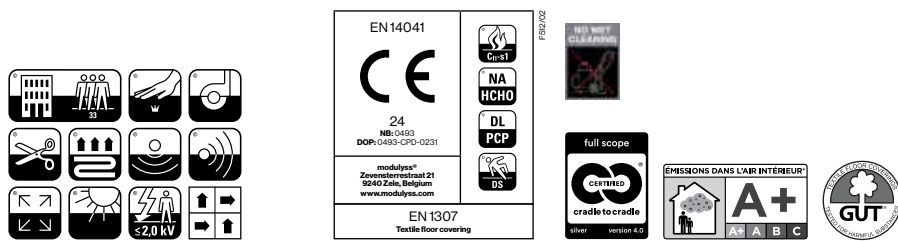

TRACE

PRICE RANGE ■■■

PART OF THE MODUS DESIGN CONCEPT



LRV 26 L 58 106



LRV 29 L 61 238



LRV 22 L 54 263



LRV 21 L 53 344



LRV 17 L 49 356



LRV 20 L 51 528



LRV 13 L 42 584



LRV 18 L 50 697



LRV 13 L 43 908



LRV 32 L 63 932



LRV 9 L 36 965




LRV 18 L 50 967

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.650 g/m ² Ca. 107.7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 600 g/m ² Ca. 17.7 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,074 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 480 g/m ² Ca. 14.2 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 21 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6.2 mm Ca. 0.24"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0.15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2.9 mm Ca. 0.11"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.165 g/cm ³ Ca. 4.451 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1x10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 183.000 /m ² Ca. 153,012/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 106,344,356,908,932,967 Silver level according to version 4.0 238,263,528,584,697,965	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	A045E075 Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

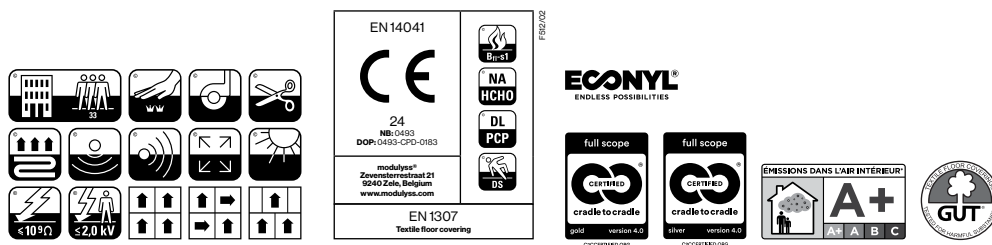

VELVET&

PRICE RANGE ■ ■ □

PART OF THE & DESIGN CONCEPT



LRV 26 L 58 130



LRV 14 L 44 212




LRV 13 L 42 213




LRV 7 L 30 283



LRV 3 L 19 346



LRV 4 L 20 483



LRV 2 L 11 541




LRV 3 L 17 550



LRV 3 L 18 573




LRV 5 L 25 609



LRV 4 L 22 616



LRV 5 L 26 662



LRV 9 L 35 823




LRV 9 L 36 907




LRV 15 L 46 932



LRV 7 L 30 963



LRV 4 L 23 965




LRV 3 L 14 990

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tip sheared Tufté 1/12" Bouclé Tip sheared Getuftet 1/12" Schlinge Tip sheared Getuft 1/12" Luspool Tip sheared	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	Back2Back: carpet tile backing with 75% recycled* content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.750 g/m ² Ca. 140.1 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 900 g/m ² Ca. 26.5 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,094 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 570 g/m ² Ca. 16.8 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 25 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,6 mm - 8,8 mm Ca. 0.3" - 0.35"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,01 0,07 0,20 0,35 0,46
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,8 mm - 5 mm Ca. 0.15" - 0.2"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,114 - 0,150 g/cm ³ Ca. 3.076 - 4.047 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 240.000 /m ² Ca. 200,671/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COULEURS ANZAHL DER FARBEN AANTAL KLEUREN	15 + 3, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	5B8A0538
		BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

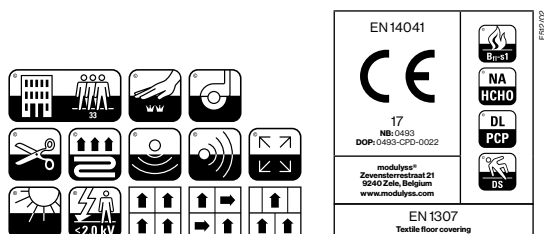

ECONYL®
ENDLESS POSSIBILITIES



WILLOW

PRICE RANGE ■■■

PART OF THE HANDCRAFT DESIGN CONCEPT



LRV 34 L 65 130



LRV 20 L 52 180



LRV 24 L 56 230



LRV 9 L 35 306



LRV 12 L 41 557



LRV 4 L 22 578



LRV 13 L 43 639



LRV 12 L 42 850



LRV 9 L 37 910



LRV 15 L 46 936



LRV 22 L 54 957




LRV 4 L 20 966

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.900 g/m ² Ca. 115.0 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 880 g/m ² Ca. 26.0 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,086 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 630 g/m ² Ca. 18.6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,5 mm Ca. 0.3"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,3 mm Ca. 0.17"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,146 g/cm ³ Ca. 3.939 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 225.000 /m ² Ca. 188,129/yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPAKKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m ² 5.98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIRSUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 130, 306, 557, 910, 957 Silver level according to version 4.0 180, 230, 578, 639, 850, 936, 966	GUT-NR BUILDING CERTIFICATION SCHEMES DGNB	D60740DB Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).** modulys is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulys sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.

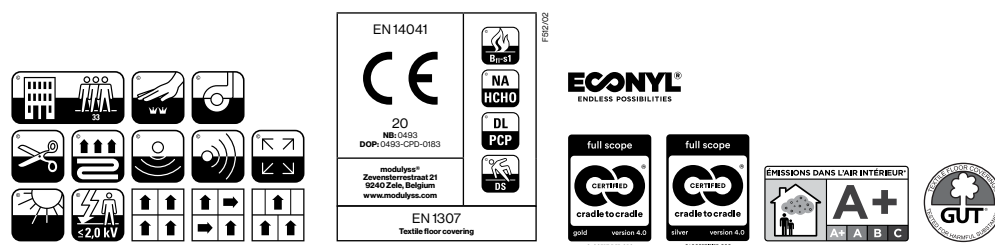

GET STARTED WITH THE MODULYSS DESIGNER.

CREATING YOUR OWN FLOOR DESIGN IS EASY.

1



SPACE

Create your own floor space. Select your room type and change the dimensions.


2



GRID

Choose from a wide range of grids. The grid defines how the carpet tiles are installed.

3

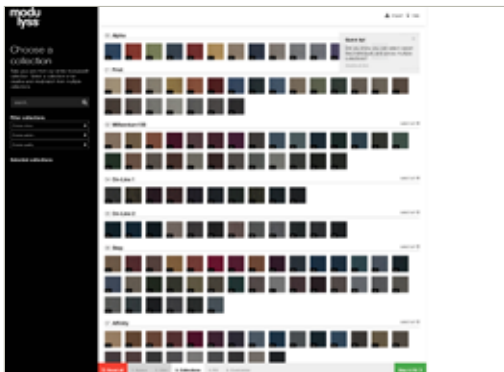

FILL

Fill your floor space with a base colour or start with a blank canvas.

4



COLLECTIONS

Choose from our entire product range. You can mix & match tiles from one or multiple collections.

5



CUSTOMISE

Change colours, add details, make patterns or randomly fill your space with the randomise option.

designer.modulyss.com



modulyss®